
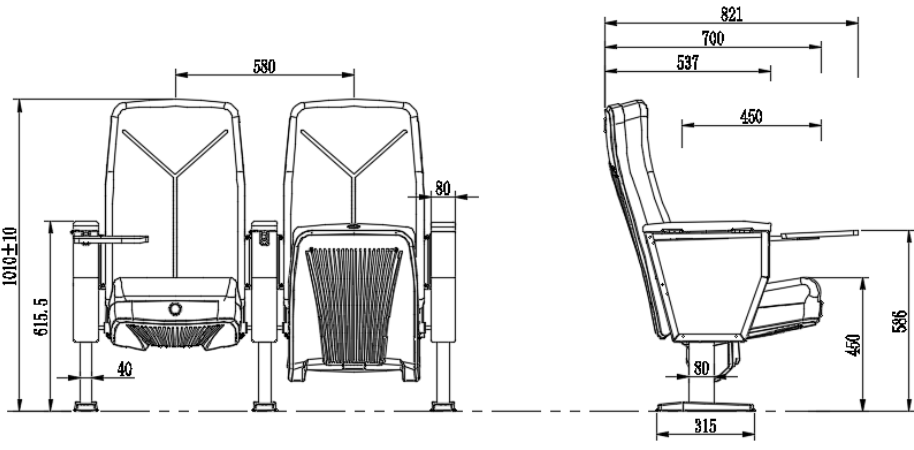


Technical Specification

Picture	Dimension (mm)
	
Back	Back sponge: High-density cold foamed PU foam. The back sponge length is 710 ± 5 mm, the width is 460 ± 5 mm, the height is 90 ± 5 mm, and the sponge density is 35-45 kg/m ³ .
	Back inner panel: high-quality plywood is formed by bending with a mold. The appearance is curved, beautiful and curvaceous. Size specifications: length is 695 ± 2 mm, width is 425 ± 2 mm, thickness is 9mm.
	Back cover: made of high-quality PP (polypropylene) multi-element composite material by die casting, size specifications: length is 770 ± 5 mm, width is 450 ± 5 mm, and height is 65 ± 5 mm.
Seat	Seat sponge: High-density cold-foamed PU stereotyped sponge. The length of the seat sponge is 480 ± 5 mm, the width is 450 ± 5 mm, the height is 100 ± 5 mm, and the sponge density is 40-55 kg/m ³ .
	Seat cover: Made of high-quality PP (polypropylene) multi-element composite material by die casting, size specifications: length is 480 ± 5 mm, width is 470 ± 5 mm, height is 95 ± 5 mm.
	Seat inner panel: High-quality splint is used for injection molding. Dimensions: length 440 ± 2 mm, width 400 ± 2 mm, thickness 10mm.
Base	The armrest frame is made of high-quality T1.8mm hot-rolled plate, the footing plate is made of 1.8 mm high-quality hot-rolled plate, and the foot frame is made of $80\times 407\times 585$ high-quality hot-rolled plate welded by carbon dioxide, and the surface is treated with anti-rust electrostatic spraying matt black.
Armrest cover	Using imported oak, size specifications: length is 412 ± 2 mm, width is 82 ± 2 mm, height is 27 ± 2 mm.
Side Board	It is composed of high-quality fabric (flannel + 2mm sponge) + MDF three-layer structure, size specifications: length is 350mm, width is 320mm, thickness: 4mm.
Fabric	The back of the seat is made of high-grade special fabric, which is stain-resistant and fade-resistant.
Return Mechanism	Seat with torsion spring return structure, and the rubber pad is added to the collision area of the seat bag to prevent collision and noise reduction, so that the seat bag opens without noise, and returns slowly without impact.
Writing Pad	With 16mm diameter solid round steel support structure, the panel adopts high-density medium fiber board, external pressure triamine board, and PVC edge sealing all around. Dimensions: length of 250 ± 2 mm, width of 240 ± 2 mm, and thickness of 15mm.



Specification	Seat width (center in armrest): 580mm, total seat height: 1010±10mm, seat height: 450±10mm.
	Seat depth: 821±10mm, writing board height: 586±10mm: minimum row spacing: 900mm.